

# ECHOBOAT-240™

Unmanned Surface Vehicle



The EchoBoat-240™ is an unmanned surface vehicle developed for hydrographic survey applications requiring the highest-resolution sensor suite available. With the new EchoBoat-240 platform, the user no longer has to sacrifice performance to meet payload capacity. This is a highly mobile survey platform featuring; multi-payload capacity, both manual and autonomous control, and interchangeable sensor suites.

While underway, the vehicle can be monitored within line-of-sight range, with over-the-horizon monitoring possible when running additional hardware. All data is stored via an onboard PC with a direct cable connection. Full equipment control and data acquisition is accomplished with a remote data link.

Switching from autonomous to remote control on the survey boat is easy using a long range remote control unit (RCU) that offers up to 2km range, with a survey endurance of up to 8 hours on a single charge.

For professional hydrographic survey requirements, the EchoBoat-240™ may be tailored to individual customer requirements. The boat may be purchased with the desired sensor payload pre-installed, or supplied ready to accept existing equipment from the User's survey equipment pool. Similarly, customized cabling can be included allowing the boat to accept existing GPS, GNSS and RTK positioning systems.

For a turnkey survey-grade system, the EchoBoat-240™ can be outfitted with singlebeam, multibeam, and side scan sonar systems.

The EchoBoat-240™ is compatible with hydrographic data acquisition software such as Hypack, PDS2000, EIVA and QINSy.



Teledyne Reson T50



Internal Deck



Twin Servo Thruster

## Instrumentation Options

### Sonar Modules

Multibeam Echosounder  
Singlebeam Echosounder  
ADCP/DVL  
Side Scan Sonar  
Subbottom Profiler  
Magnetometer

### Auxiliary Sensors

Sound Velocimeter  
Sound Velocity Profiler / CTD  
Wi-Fi Remote Desktop  
HD Thermal Camera  
Remote SVP Winch  
LiDAR

### GPS/GNSS

RTK/GNSS  
DGPS  
INS



R2 Sonic 2024

Seafloor Systems, Incorporated | 4415 Commodity Way | Shingle Springs, CA 95682 | USA

info@seafloor.com | www.seaflorsystems.com



REV 1/10/22

# ECHOBOAT-240™

## Unmanned Surface Vehicle

### Specifications (All specifications are subject to change..)

|                               |                                                                         |
|-------------------------------|-------------------------------------------------------------------------|
| Typical Survey Speed          | 2 knots                                                                 |
| Top Speed                     | 4 knots                                                                 |
| Hull Length                   | 2.4 m                                                                   |
| Hull Width                    | 0.9 m                                                                   |
| Battery Endurance             | Up to 8 hours                                                           |
| Payload                       | 90.7 kg / 200 lbs                                                       |
| Power                         | 25.2 VDC                                                                |
| Motor                         | 2x Brushless DC Outdrive                                                |
| Hull Material                 | UV Resistant HDPE                                                       |
| Empty Hull Weight & Batteries | 158.75 kg / 350 lbs                                                     |
| Transducer Wells              | 3: Main, ADCP/DVL, SVP                                                  |
| Hardware                      | Stainless Steel                                                         |
| R/C                           | 2.4 GHz/900MHz Long Range RCU (US)<br>2.4 GHz/868MHz Long Range RCU(EU) |
| Remote Control Range          | Up to 2 km                                                              |
| GPS                           | Customer Specified                                                      |
| Communications                | 2.4 GHz UHF Telemetry                                                   |

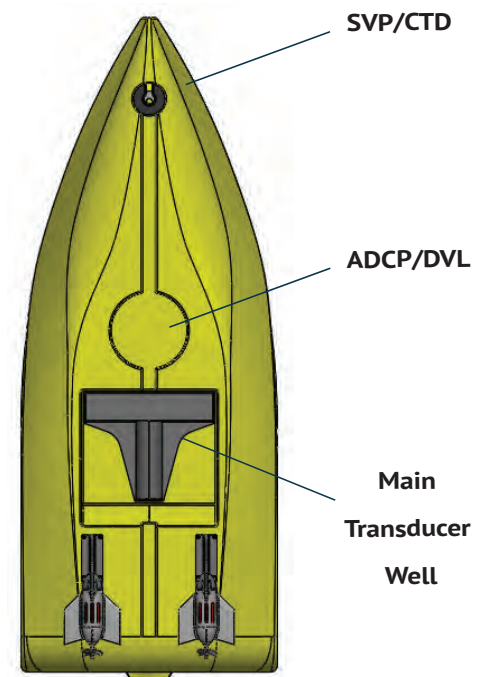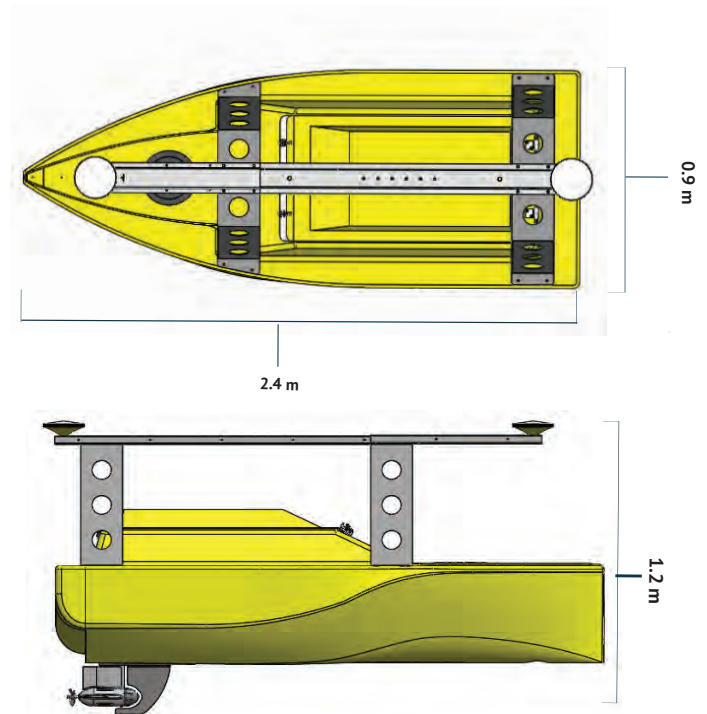

### Additional Features Include

- 2 x 25.2 VDC auxiliary power sockets
- Internal power switches
- Intelligent power supply with protected power management
- Wave piercing displacement hull design
- Independent activated thrusters
- Non-corrosive, rugged HDPE hull constructions
- Isolated battery compartment
- Configurable cargo deck
- Integral industrial PC, WiFi and/or 4G communication

Seafloor Systems, Incorporated | 4415 Commodity Way | Shingle Springs, CA 95682 | USA

info@seafloor.com | www.seaflorsystems.com

REV 1/10/22